

Topic: 6. Single Record Fetching/Updating using PK (PUT/DELETE)

Speaker: / Notebook: API Development using Django Framework




1. To fetch a single record using a primary, we update the URLS.PY and add a new path:

```
api > urls.py > ...
1 from django.urls import path
2 from . import views
3
4 urlpatterns = [
5     path('students/', views.studentsView),
6     path('students/<int:pk>/', views.studentDetailView),
7 ]
```


2. Update the VIEWS.PY and add the path plus the primary to search:

```
api > views.py > ...
26
27 @api_view(['GET'])
28 def studentDetailView(request, pk):
29     try:
30         student = Student.objects.get(pk=pk)
31     except Student.DoesNotExist:
32         return Response(status=status.HTTP_404_NOT_FOUND)
33
34     if request.method == 'GET':
35         serializer = StudentSerializer(student)
36         return Response(serializer.data, status=status.HTTP_200_OK)
37
38
```


3. Using the POSTMAN, add the part and the primary key to retrieve that specific record. Click SEND:

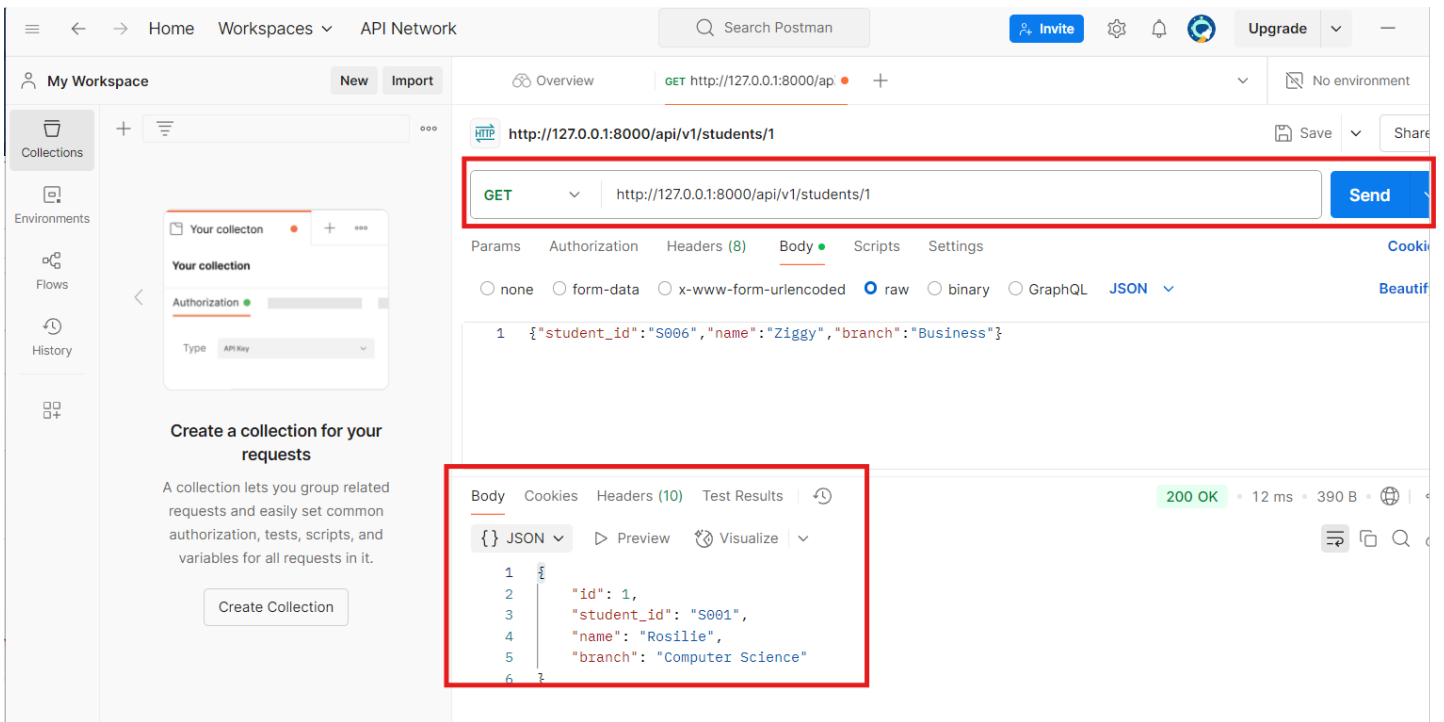

In case, you search for the record that doesn't exist, the 404 error message should display:

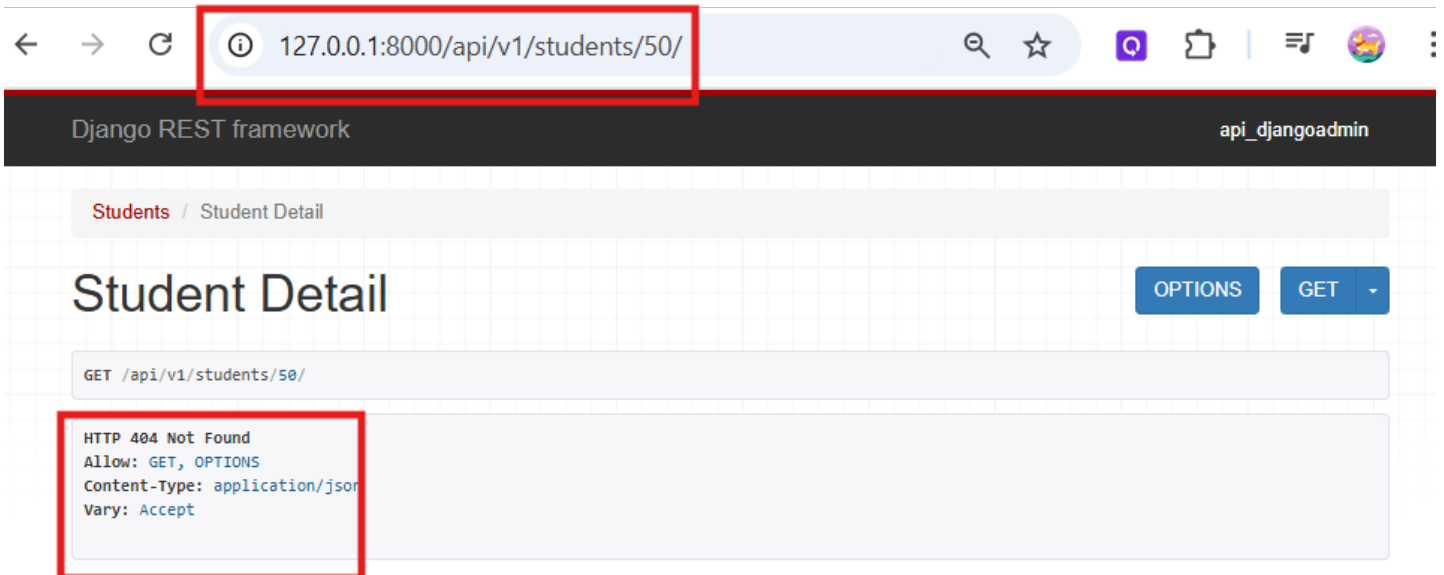

4. In POSTMAN (we changed the theme), if you have a non-existing record:

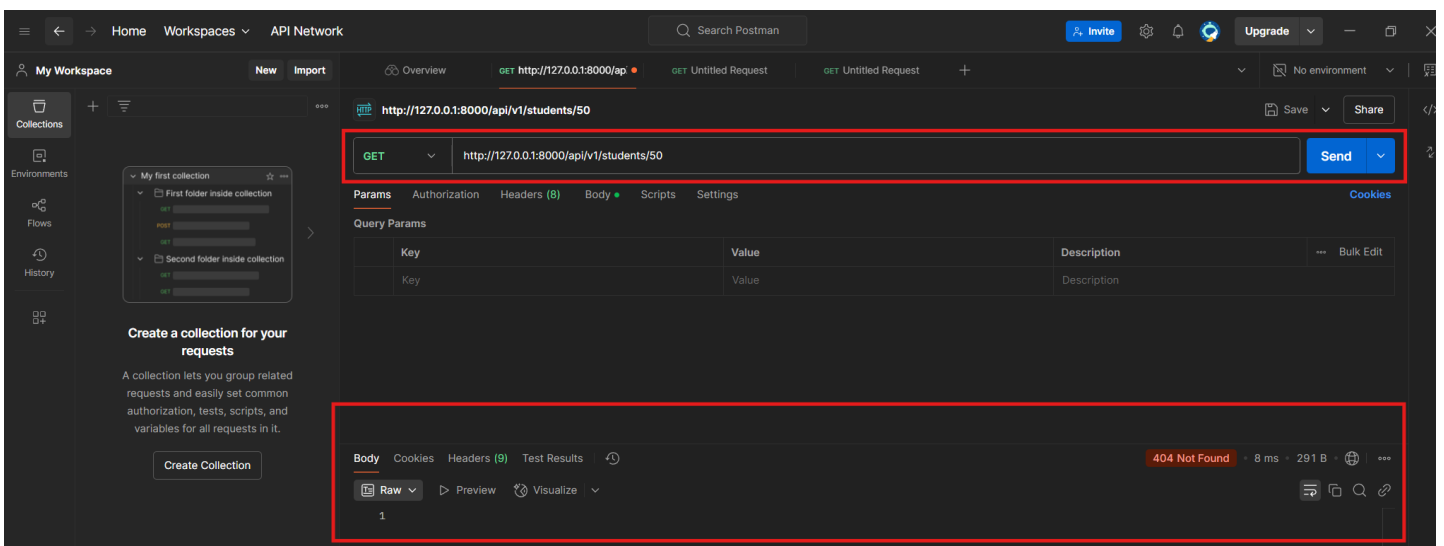

5. To update a specific record, we update the VIEWS.PY. We use the PUT method.

```
26
27 @api_view(['GET', 'PUT'])
28 def studentDetailView(request, pk):
29     try:
30         student = Student.objects.get(pk=pk)
31     except Student.DoesNotExist:
32         return Response(status=status.HTTP_404_NOT_FOUND)
33
34     # fetch a specific record using the PK
35     if request.method == 'GET':
36         serializer = StudentSerializer(student)
37         return Response(serializer.data, status=status.HTTP_200_OK)
38
39     # update a specific record using the PK
40     elif request.method == 'PUT':
41         serializer = StudentSerializer(student, data=request.data)
42         if serializer.is_valid():
43             serializer.save()
44             return Response(serializer.data, status=status.HTTP_200_OK)
45         else:
46             return Response(serializer.errors, status=status.HTTP_400_BAD_REQUEST)
47
48
```

Updating the record:

14 | Pe | Se | x | hc | Se | Pc | ic | +

← → ↻ ⓘ 127.0.0.1:8000/api/v1/students/2/ 🔍 ☆ 🗄️ 🎵 🌐

Django REST framework api_djangoadmin

Students / Student Detail

Student Detail

OPTIONS GET ▾

GET /api/v1/students/2/

HTTP 200 OK
Allow: GET, PUT, OPTIONS
Content-Type: application/json
Vary: Accept

```
{
  "id": 2,
  "student_id": "S002",
  "name": "Yuri",
  "branch": "Engineering"
}
```


Media type: application/json ▾

Content:


```
{
  "student_id": "S002",
  "name": "Yuri",
  "branch": "Aviation"
}
```

PUT

6. Using the POSTMAN , use the PUT method with the primary record number:

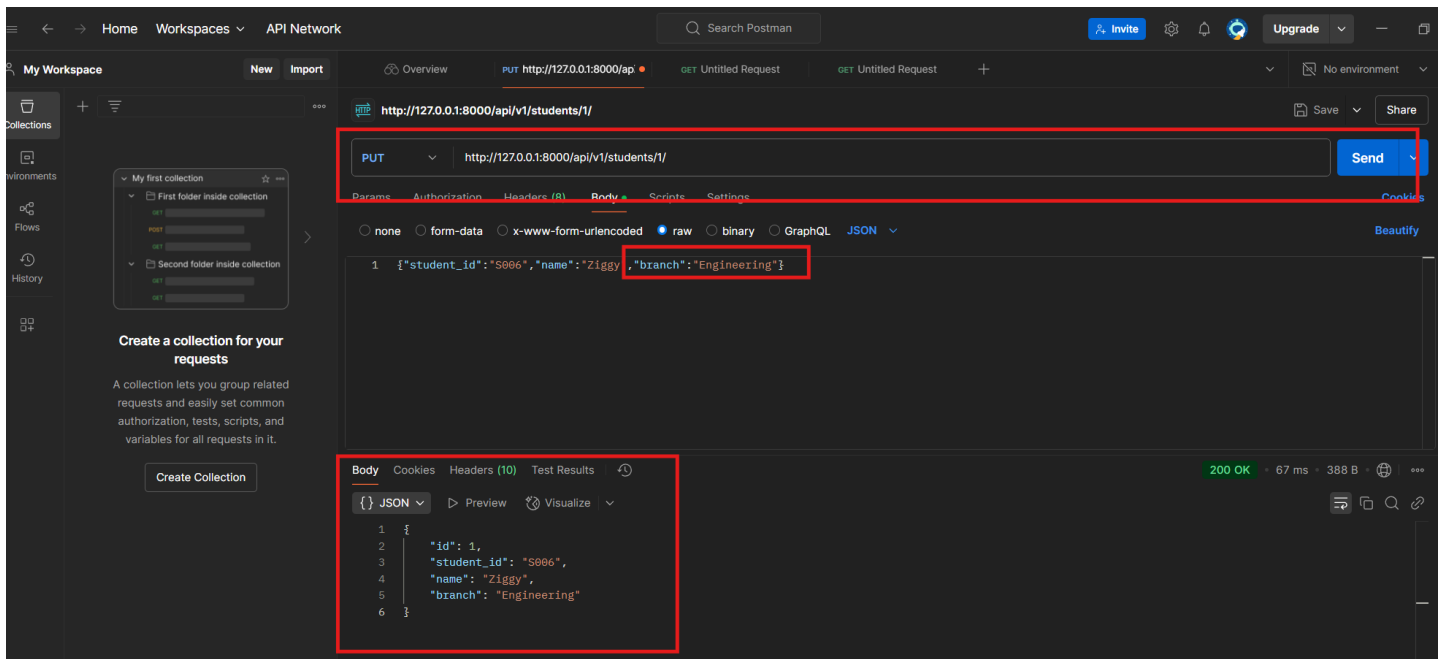

7. To delete a record, use the DELETE method. Update the VIEWS.PY:

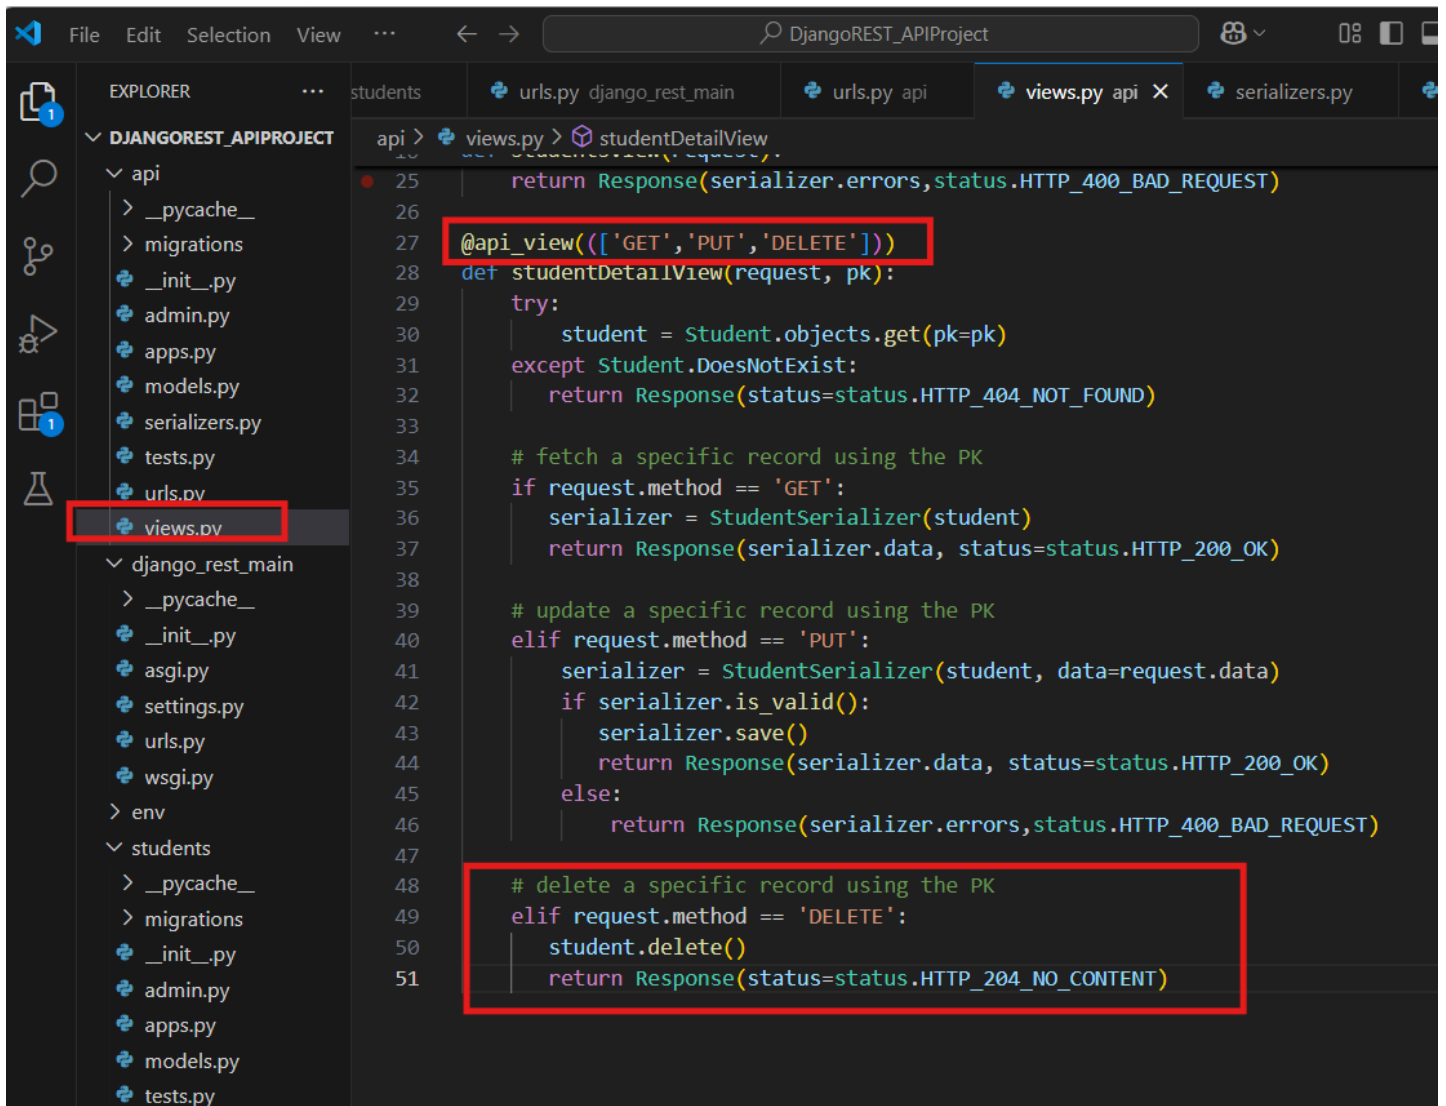

```
    "id": 1,
    "student_id": "S001",
    "name": "Rosilie",
    "branch": "Computer Science"
  },
  {
    "id": 2,
    "student_id": "S002",
    "name": "Yuri",
    "branch": "Aviation"
  },
  {
    "id": 3,
    "student_id": "S003",
    "name": "Xeria",
    "branch": "Hotel Mgt"
  },
  {
    "id": 4,
    "student_id": "S004",
    "name": "Russell",
    "branch": "Veterinary"
  },
  {
    "id": 5,
    "student_id": "S005",
    "name": "Mary Ann",
    "branch": "Engineering"
  },
  {
    "id": 6,
    "student_id": "S006",
    "name": "Ziggy",
    "branch": "Business"
  }
]
```

Media type:

application/json

Content:

```
{
  "student_id": "S008",
  "name": "Some Strangers",
  "branch": "N/A"
}
```



POST

When you reload your page, you will see the DELETE button:

← → 127.0.0.1:8000/api/v1/students/7/ Django REST framework api_djangoadmin

Students / Student Detail

Student Detail

DELETE OPTIONS GET

GET /api/v1/students/7/

HTTP 200 OK
Allow: GET, OPTIONS, PUT, DELETE
Content-Type: application/json
Vary: Accept

```
{  
  "id": 7,  
  "student_id": "S008",  
  "name": "Some Strangers",  
  "branch": "N/A"  
}
```

Media type: application/json

Content:

PUT

8. Now, reload your page and locate that deleted record, it should return HTTP error message:

→ 127.0.0.1:8000/api/v1/students/7/ Django REST framework api_djangoadmin

Students / Student Detail

Student Detail

DELETE OPTIONS GET


DELETE /api/v1/students/7/

HTTP 204 No Content
Allow: GET, OPTIONS, PUT, DELETE
Content-Type: application/json
Vary: Accept


Media type: application/json

Content:

9. Using the POSTMAN, use the delete the method. Assume you have added several records. Delete these unnecessary records.

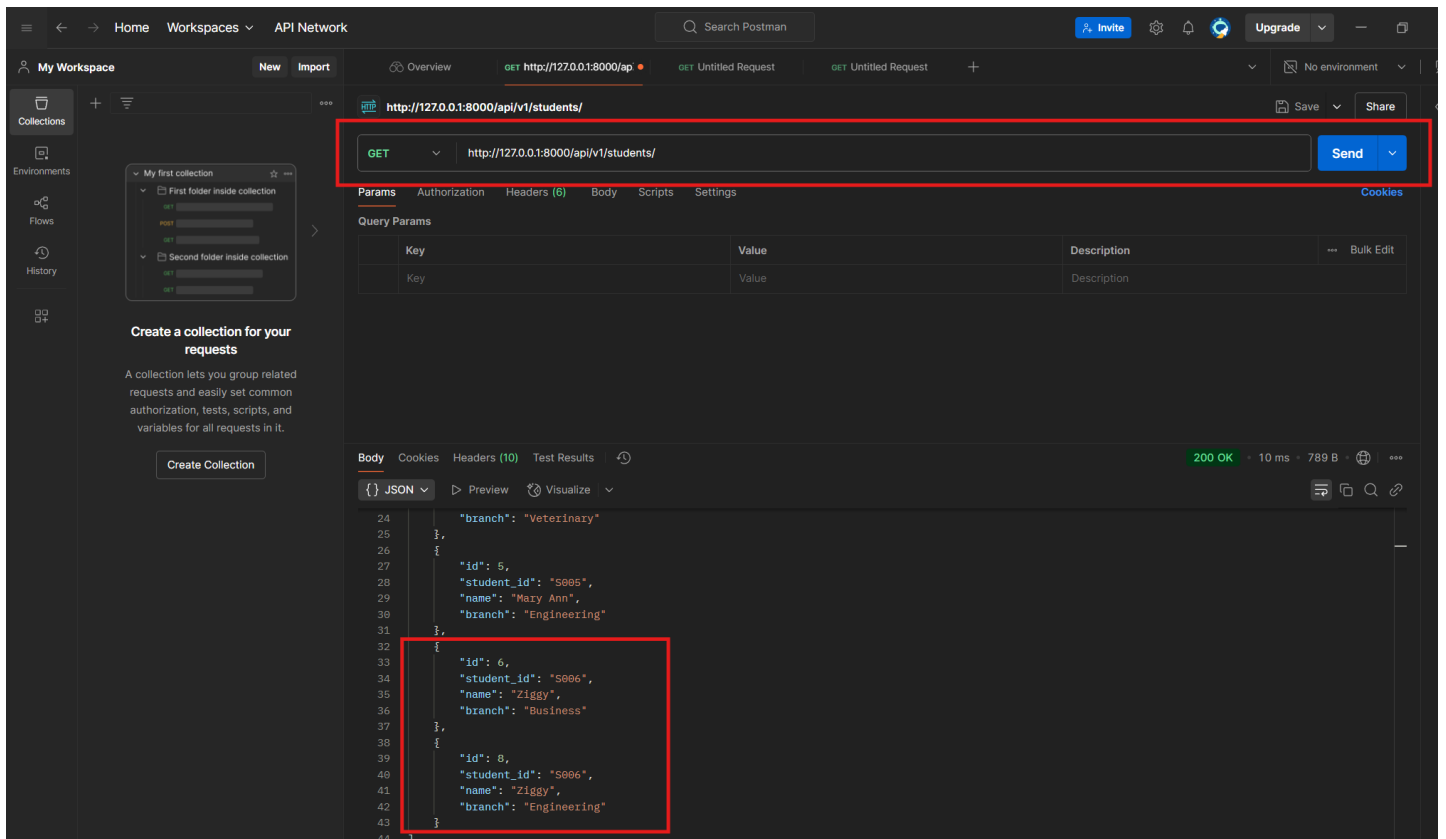

When you use the DELETE method and click SEND, the output should be.

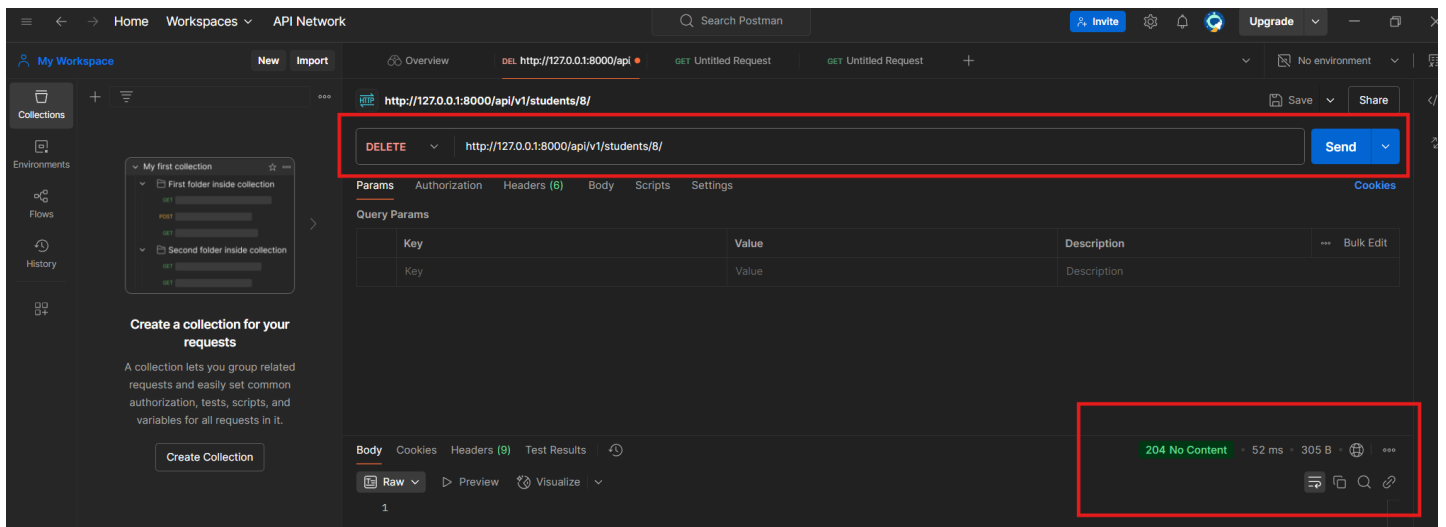

10.